

4

3

2

1


NOTES: UNLESS OTHERWISE SPECIFIED

1. REMOVE ALL BURRS & SHARP EDGES (.005-.015)

2 PERMANENTLY MARK, METAL STAMP OR ETCH USING .09 HIGH X 0.030 LINE X 0.004 DEEP GOTHIC CHARACTERS IN ACCORDANCE WITH SAE/ AS478, LOCATE APPROXIMATELY WHERE SHOWN.

3. TOTAL LENGTH 25.75 NEUTRAL POSITION (OUT OF BOX)

4 TOTAL MAXIMUM WEIGHT 9.0 LBS.

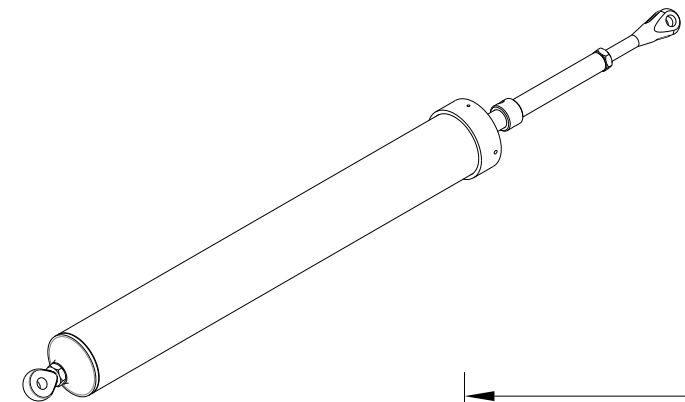

25.75" NEUTRAL POSITION (OUT OF BOX)

Jam Nut Torque 95-110 IN LBS



Jam Nut Torque 95-110 IN LBS

B

B

A

4

		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES EXCEPT AS NOTED DECIMALS .X .1 ANGLES .X .5 .XX .02 .XXX .005		AIRGLAS, INC. Anchorage, Alaska	
		THIS DRAWING OR DOCUMENT INCLUDES INFORMATION PROPRIETARY TO AIRGLAS Inc. AND IS SUBMITTED FOR EVALUATION ONLY AND SHALL NOT BE USED TO MANUFACTURE OR REPRODUCE WITHOUT PERMISSION OF AIRGLAS Inc.		Approved by : WKL	
L20500A-2 AH-64D				Checked by : GL	
L20500A-1 AH-64D				Date : SEPTEMBER 22, 2003	
NEXT ASSY USED ON				Size B Code Ident.No. 17564	
APPLICATION				L20500A-8A REV D	
				Scale 1:4 Sheet 1 OF 2	

SPRING CYLINDER, MAIN SKI

4

3

2

1